

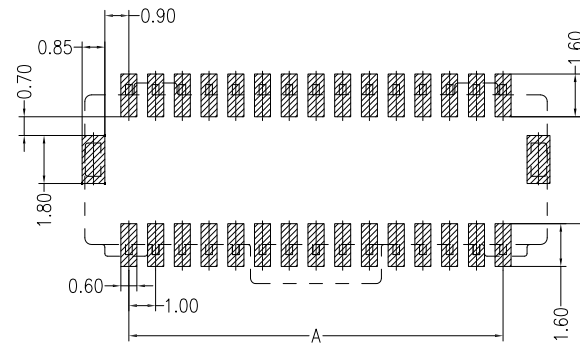
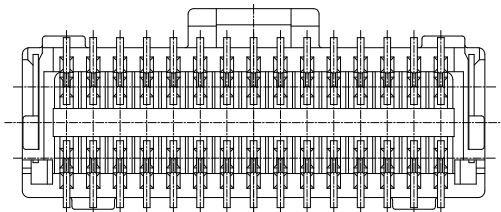
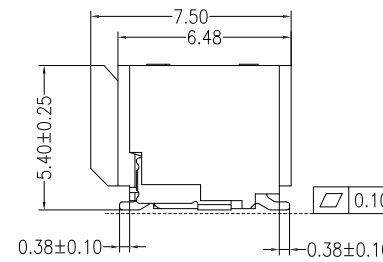
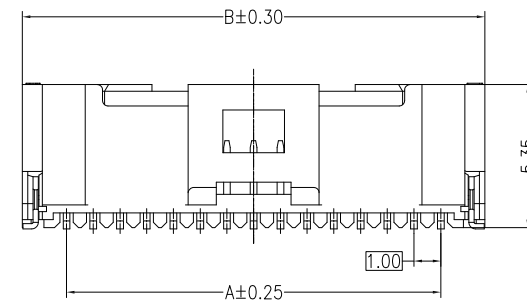
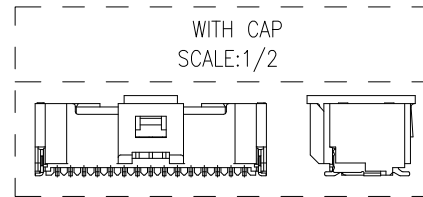


RoHS

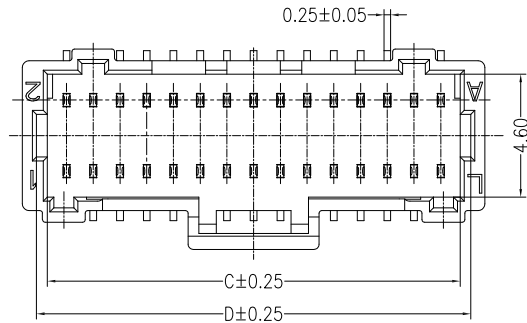

PCB LAYOUT(Tolerance:±0.05)



SPECIFICATION

- Voltage rating: 50V AC, DC
- Current Rating: 1A, AC, DC
- Withstand voltage: 250V AC/minute
- Contact resistance: 20mΩ Max
- After environmental testing: 30mΩ Max
- Insulation resistance: 100MΩ min
- Temperature range: -40° C ~ +105° C

WAFER

- Material: Base, PA9T UL94V-0;
pin: Phosphor bronze Gold-plated
Solder Tabs: Brass Tin-plated
Cap: PA9T UL94V-0
Color: Blank-natural color or BLACK

JVT1005W9T-2*XXGAXXC-S
Logo Series NO. Wafer PA9T Pin NO. SMT Cap BK-BLACK Blank-Natural color GA-All gold plating



PIN.	DIM A	DIM B	DIM C	DIM D
2x10P	9.00	12.30	10.45	11.25
2x15P	14.00	17.30	15.45	16.25
2x20P	19.00	22.30	20.45	21.25
2x25P	24.00	27.30	25.45	26.25

				GENERAL TOLERANCE		JVT JOYTECH CONNECTORS JOYTECH CONNECTORS					Approved by	Check	Design	Standard	1.0mm 180° WAFER Double row SMT CAP			
				0	±0.40						LI	CLYDE	HUANG	P/N	JVT1005W9T-2*XXGAXXC-S			
				.0	±0.35													
				.00	±0.25													
Version	Content of change	Date	Signature			Unit	mm	Scale	1:1	Date	20210922				Map title	141	Version	A0

JVT 乔业连接器
JVT CONNECTORS
CONNECTORS

