

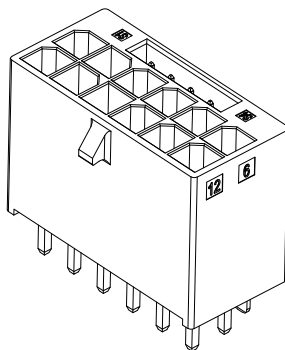
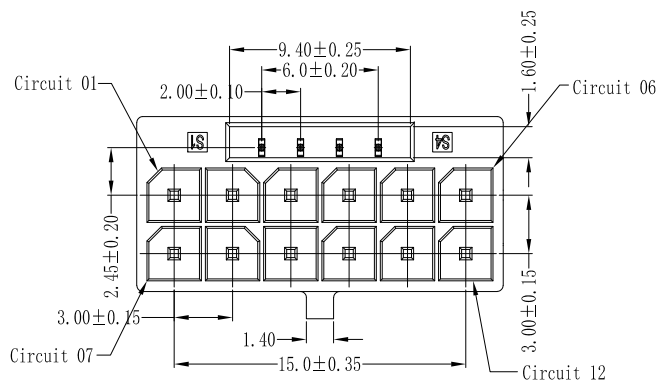
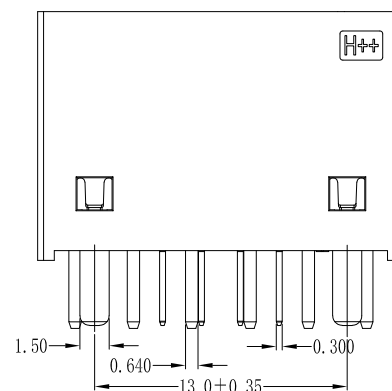


RoHS

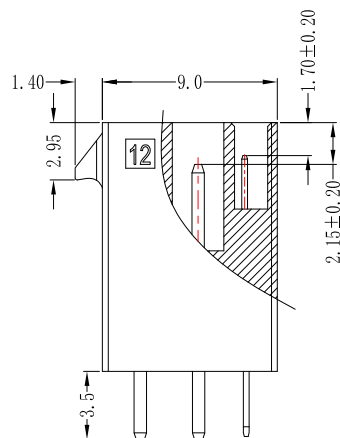


3. ELECTRICAL CHARACTERISTICS:
CURRENT RATING:9.2A PER PIN(PWR & GND PIN)
DIELECTRIC WITHSTANDING VOLTAGE: 1000 VAC 1 MINUTE
INSULATION RESISTANCE:1000MΩ MIN. AT 500V/DC
CONTACT RESISTANCE:10mΩ MAX
TEMPERATURE RANGE:-40° C~+105° C

*Material:
Base:PA9T UL94V-0
Color:Black
PWR & GND Pin:High conductivity copper
Sense Pin:Phosphor Bronze
Board Lock:Brass
Finish: Tin-plated

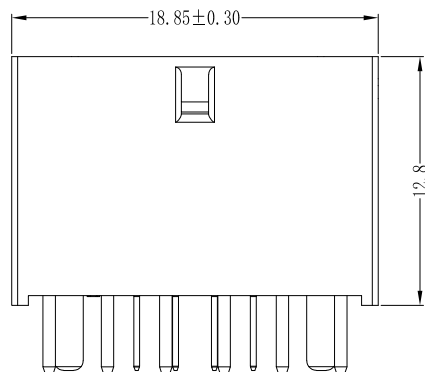

JVT3026W9T-12+04SNBK-D
logo—
Series NO.—
Wafer—
9T-PA9T UL94V-0—
D-DIP
BK-Black
SN-Tin Plated
Pin NO.

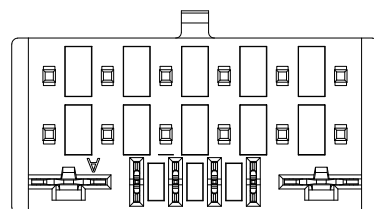

				GENERAL TOLERANCE		 乔业连接器 JVT CONNECTORS CONNECTORS					Approved by	Check	Design	Standard	3.0mm±2.0mm-12+04P WAFER 180° DIP		
				0 ±0.35							LI	CLYDE	LU	P/N	JVT3026W9T-12+04SNBK-D		
				.0 ±0.30										Map title	272	Version	A
				.00 ±0.25													
Version	Content of change			Date	Signature		Unit	mm	Scale	1:1	Date	20231211					