
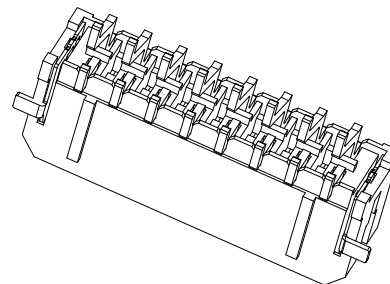


RoHS



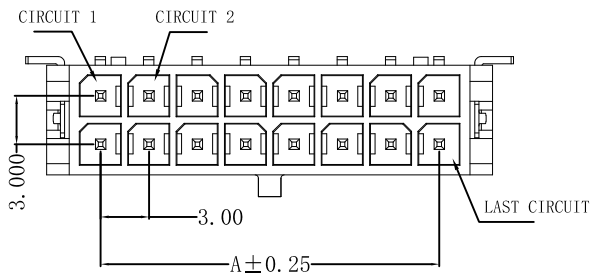


SPECIFICATION

- Voltage rating: 250V AC, DC
- Current Rating: 5A, AC, DC
- Withstand voltage: 1000V AC/minute
- Contact resistance: 10mΩ max
- Insulation resistance: 1000MΩ min
- After enviornmental testing: 20mΩ max
- Temperature range: -40℃ ~ +105℃

WAFER

- Material: Base: LCP UL94V-0
- Mates With Part(s): JVT3025 Crimp Housing and Terminal

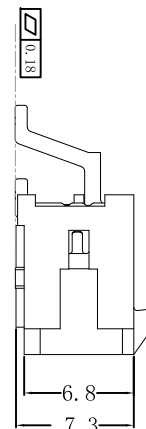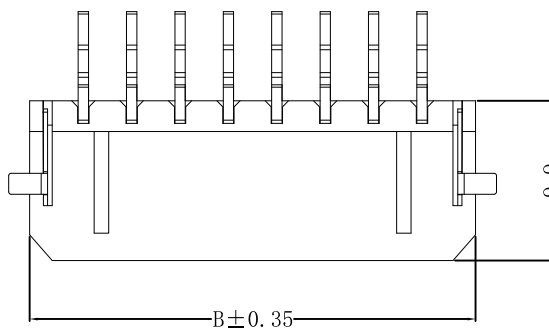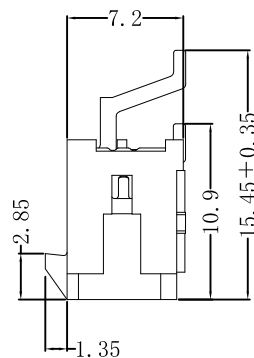

JVT3026WLP-2XXSWR-S

Logo

Series NO.

Wafer



LCP

S-SMT

R-Right Angle 90°

SW-Fog tin plating

Pin NO.

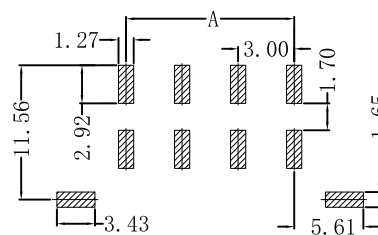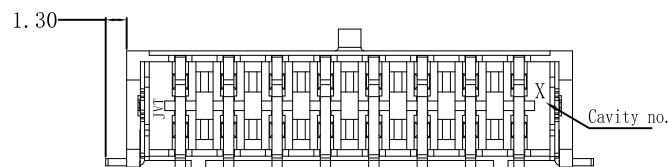

P. C. B. LAYOUT



Poles	Dimensions (mm)		Poles	Dimensions (mm)	
	A	B		A	B
2*01	--	6.65	2*07	18.00	24.65
2*02	3.00	9.65	2*08	21.00	27.65
2*03	6.00	12.65	2*09	24.00	30.65
2*04	9.00	15.65	2*10	27.00	33.65
2*05	12.00	18.65	2*11	30.00	36.65
2*06	15.00	21.65	2*12	33.00	39.65

JVT3026WLP-2XXSWR-S	LCP UL 94V-0	Brass	Tin Plated Fog	Brass	Tin Plated Fog
JVT3026WLP-2XXSNR-S	LCP UL 94V-0		Tin-Plated		Tin-Plated
PART NO	Material	Material (Pin)	Finish (Pin)	Material (Solder Tabs)	Finish (Solder Tabs)

GENERAL TOLERANCE:	
0	±0.35
.0	±0.30
.00	±0.20
.000	±0.10

JVT 乔业连接器
JVT CONNECTORS

Approved by	Check	Design	Standard	3.0mm 90° DUAL ROW WAFER SMT		
LI	CLYDE	LU	P/N	JVT3026WLP-2XXSWR-S		
			Map title	031	Version	A0

Version	Content of change	Date	Signature
---------	-------------------	------	-----------