
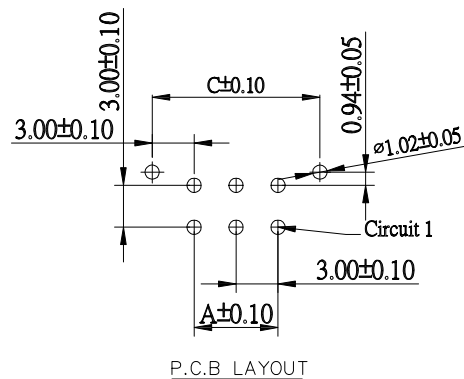
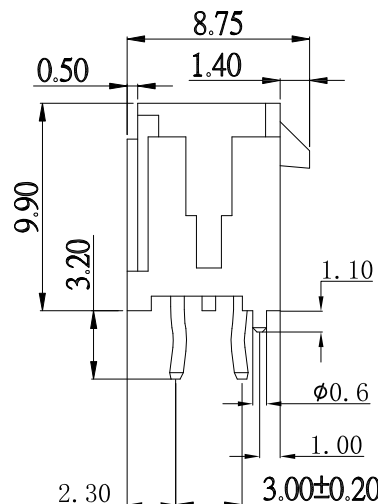
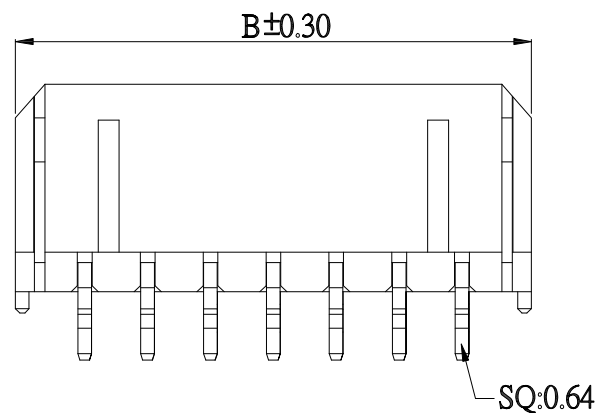



RoHS

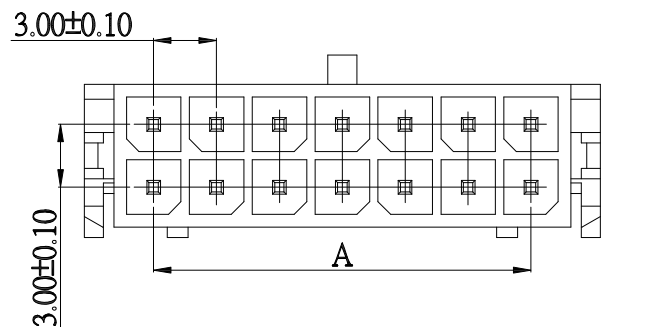

Specifications

- Voltage rating: 250V AC / DC
- Current rating: 5A AC / DC
- Withstanding voltage: 1000V AC/minute
- Temperature range: -40° C~+105° C
- Insulation resistance: ≥1000MΩ
- Contact resistance: ≤10mΩ
- After environmental testing ≤20mΩ
- Suitable JVT3025T series Terminal
JVT3025H series Housing
- " * " is the key control size

WAFER

- Material: LCP UL94V-0
- Contact, Brass Tin-plated

JVT3026WLP-2*XXSNPK-D

Logo
Series NO.
Wafer
LP-LCP

DIP
K-With kink
P-With Post
SN-Tin Plated
Pin NO.



Circuit	A	B	C	Circuit	A	B	C
2*01	-	-	6.65	2*07	18.00	24.65	24.00
2*02	3.00	9.65	9.00	2*08	21.00	27.65	27.00
2*03	6.00	12.65	12.00	2*09	24.00	30.65	30.00
2*04	9.00	15.65	15.00	2*10	27.00	33.65	33.00
2*05	12.00	18.65	18.00	2*11	30.00	36.65	36.00
2*06	15.00	21.65	21.00	2*12	33.00	39.65	39.00

Version		Content of change		Date		Signature		GENERAL TOLERANCE		Unit		mm		Scale		1:1		Date		20180426		Approved by		Check		Design		Standard		3.0mm Double row WAFER With kink	
A		B		C		D		E		F		G		H		LI		CLYDE		LU		P/N		Map title		010		Version		A0	