
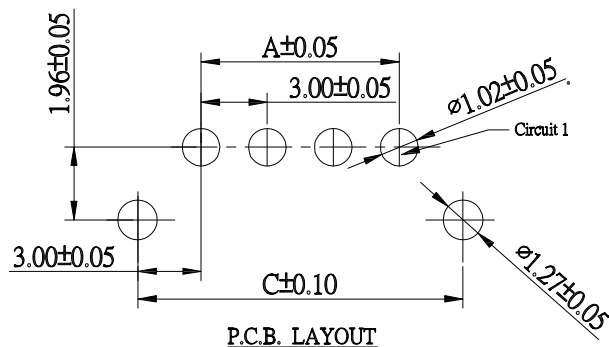
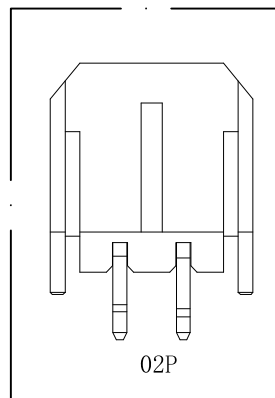
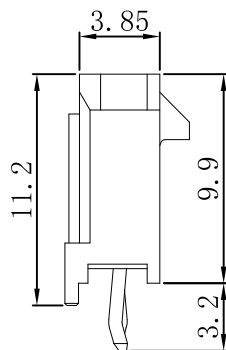
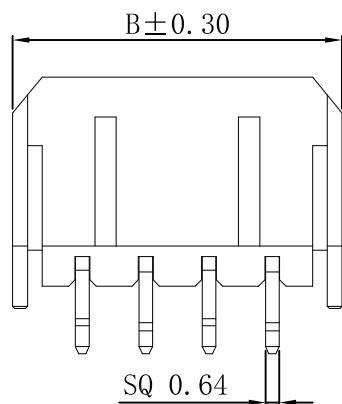
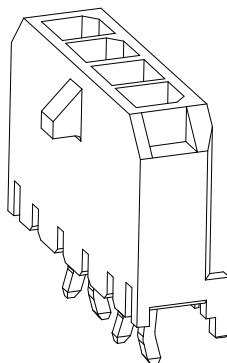


RoHS

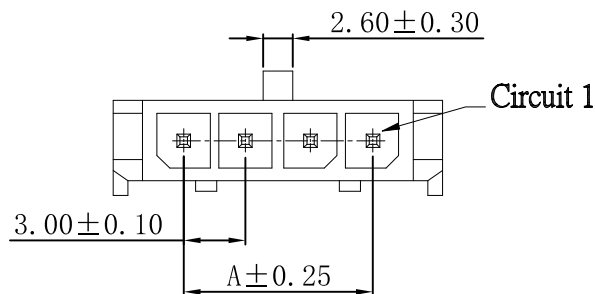

Specifications

- Voltage rating: 250V AC/DC
- Current rating: 5A AC/DC
- Withstanding voltage: 1000V AC/minute
- Temperature range: -40° C~+105° C
- Insulation resistance: $\geq 1000M\Omega$
- Contact resistance: $10m\Omega$ MAX
- Suitable JVT3025H series Housing
JVT3025T series Terminal

WAFER

- Material: Base, PA66 UL94V-0
pin: Brass Tin-plated
Color: Black

JVT3026WN0-XXSNK-D
Logo—
Series NO.—
Wafer—
NO-PA66 UL94V-0—
D-DIP
K-With kink
SN-Tin Plated
Pin NO.

PIN	DIM (mm)		
	A	B	C
01	—	—	—
02	3.00	9.65	9.00
03	6.00	12.65	12.00
04	9.00	15.65	15.00
05	12.00	18.65	18.00
06	15.00	21.65	21.00
07	18.00	24.65	24.00
08	21.00	27.65	27.00
09	24.00	30.65	30.00
10	27.00	33.65	33.00
11	30.00	36.65	36.00
12	33.00	39.65	39.00

				GENERAL TOLERANCE		JVT 乔业连接器 JVT CONNECTORS						Approved by	Check	Design	Standard	3.0mm Single row 180° WAFER DIP With kink		
				0 ±0.35														
				.0 ±0.30														
				.00 ±0.20														
A1	新增卡扣宽度尺寸	20230615	CLYDE	.000 ±0.10								LI	CLYDE	LIU	P/N	JVT3026WN0-XXSNK-D		
Version	Content of change	Date	Signature			Unit	mm	Scale	1:1	Date	20230615				Map title	010	Version	A1