



RoHS

SPECIFICATION







- Voltage rating: 250V AC, DC
- Current Rating: 5A, AC, DC
- Withstand voltage: 1000V AC/minute
- Contact resistance: 10mΩ max
- Insulation resistance: 1000MΩ min
- After enviornmental testing: 20mΩ max
- Temperature range: -40℃ ~ +105℃

WAFER

- Material: Base: PA66 UL 94V-0
- Mates With Part(s): JVT3025 Crimp HSG and TER

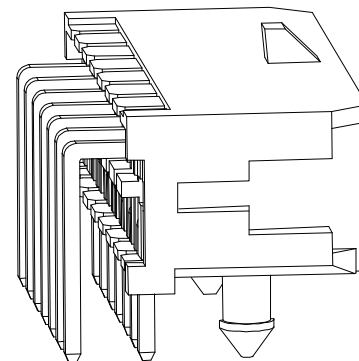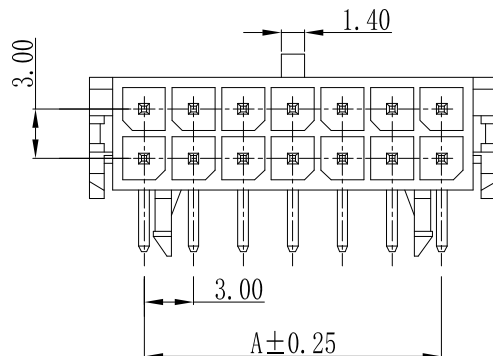

JVT3026WNO-2*XXSNRP-D
Logo
Series NO.
Wafer
PA66 UL94V-0
DIP
P-With boss
R-Right Angle 90°
SN-Tin Plated
Pin NO.

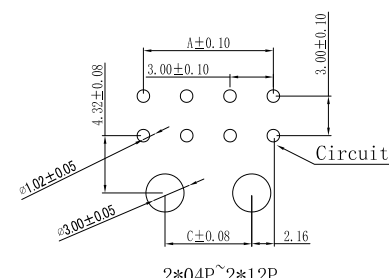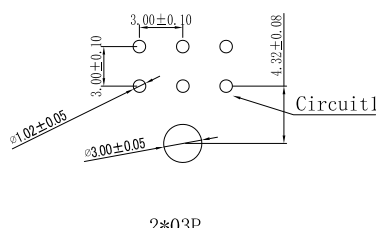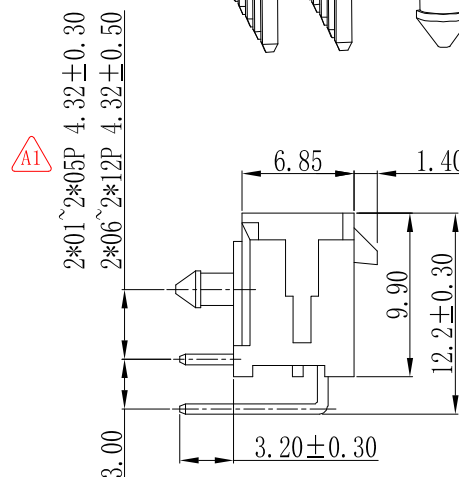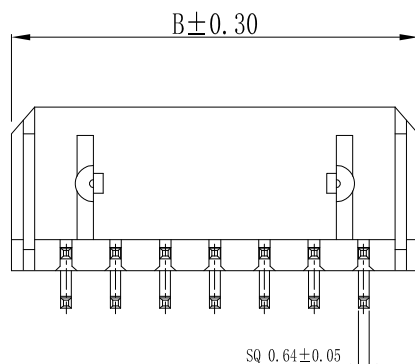

PCB LAYOUT



Dimensions:

circuit	A	B	C
2*01	—	6.65	—
2*02	3.00	9.65	—
2*03	6.00	12.65	—
2*04	9.00	15.65	4.70
2*05	12.00	18.65	7.70
2*06	15.00	21.65	10.70
2*07	18.00	24.65	13.70
2*08	21.00	27.65	16.70
2*09	24.00	30.65	19.70
2*10	27.00	33.65	22.70
2*11	30.00	36.65	25.70
2*12	33.00	39.65	28.70

				GENERAL TOLERANCE				JVT 乔业连接器 JVT CONNECTORS				Approved by	Check	Design	Standard	3.0mm 90° DIP WAFER				
				0 ±0.35								LI	CLYDE	LU	P/N	JVT3026WNO-2*XXSNRP-D				
				.0 ±0.30																
				.00 ±0.25																
A1	更新 A1 处尺寸及公差			20230614	CLYDE	.000 ±0.10														
Version	Content of change			Date	Signature					Unit	mm	Scale	1:1	Date	20230614					
A				B		C		D			E			F		G			H	