
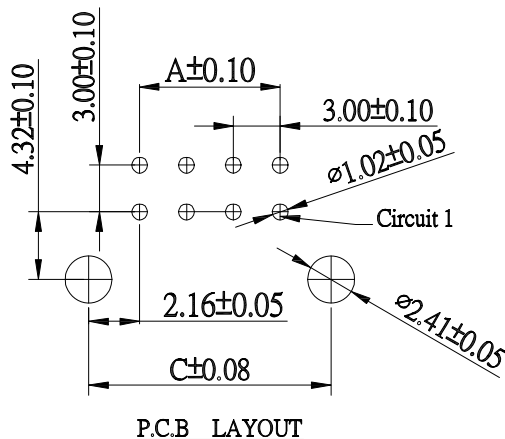
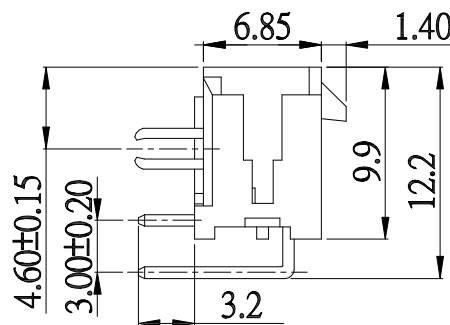
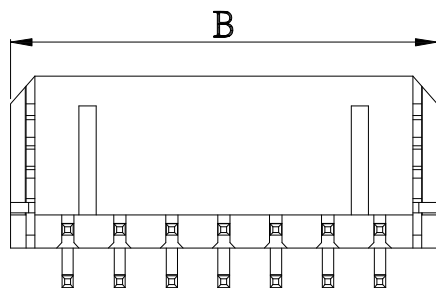



RoHS

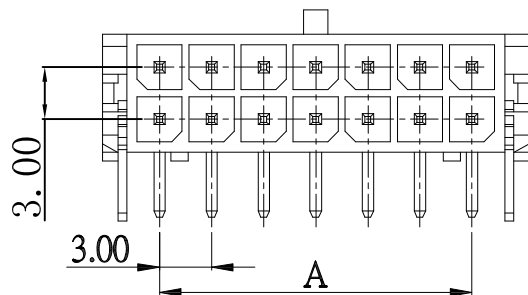

Specifications

- Voltage rating: 250V AC / DC
- Current rating: 5A AC / DC
- Withstanding voltage: 1000V AC/minute
- Temperature range: -40° C~+105° C
- Insulation resistance: $\geq 1000M\Omega$
- Contact resistance: $\leq 10m\Omega$
- After environmental testing $\leq 20m\Omega$
- Suitable JVT3025T series Terminal
- JVT3025H series Housing
- " * " is the key control size

WAFER

- Material: LCP/PBT+30%GF UL94V-0
- Contact: Brass Tin-plated
- Color: Black

JVT3026WXX-2*XXSNRP1-D

Logo
Series NO.
WAFER
PT-PBT
LP-LCP
Pin NO.

DIP
P1-带鱼叉
R-Right Angle 90°
SN-Tin Plated

circuit	A	B	C	circuit	A	B	C
2*01	--	6.65	4.30	2*07	18.00	24.65	22.30
2*02	3.00	9.65	7.30	2*08	21.00	27.65	25.30
2*03	6.00	12.65	10.30	2*09	24.00	30.65	28.30
2*04	9.00	15.65	13.30	2*10	27.00	33.65	31.30
2*05	12.00	18.65	16.30	2*11	30.00	36.65	34.30
2*06	15.00	21.65	19.30	2*12	33.00	39.65	37.30

				GENERAL TOLERANCE		 乔业连接器 JVT CONNECTORS						Approved by	Check	Design	Standard	3.0mm Double row WAFER 90° DIP 带鱼叉							
				0 ±0.35									Unit	mm	Scale	1:1	Date	20170408	LI	CLYDE	LIU	P/N	JVT3026WXX-2*XXSNRP1-D
				.0 ±0.30																			
				.00 ±0.20																			
				.000 ±0.10																			
Version	Content of change			Date	Signature												Map title	010	Version	A0			