



RoHS



9.70±0.25

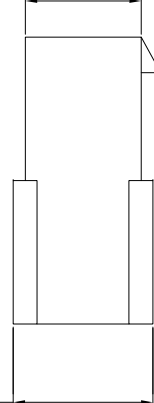


11.70±0.25

SPECIFICATION



- Voltage rating: 600V AC, DC
- Current Rating: 7A, AC, DC
- Withstand voltage: 1500V AC/minute
- Contact resistance: 20mΩ max
- Insulation resistance: 1000MΩ min
- Temperature range: -40° C ~ +105° C

HOUSING


- Material: Nylon 66 UL 94V-0/2

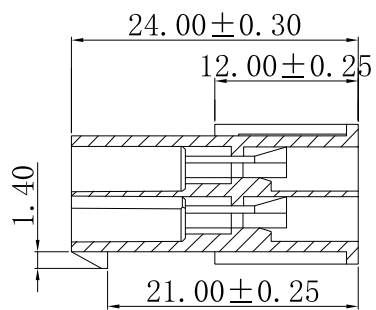

SECTION A-A



3方5圆



JVT1148HXX-2*04XX-T78

logo
Series NO.
Housing
N2-PA66 UL94V-2
N0-PA66 UL94V-0
Pin NO.

Twins7/8
Blank-natural color
BK-Black
RE-Red
BL-Blue
GR-Green
OR-Orange
YE-Yellow
PR-Purple



3方5圆

						GENERAL TOLERANCE				JVT 乔业连接器 JVT CONNECTORS CONNECTORS				Approved by	Check	Design	Standard	MOLEX4.2mm With wings HSG			
						0	±0.35							LI	CLYDE	LU	P/N	JVT1148HXX-2*04XX-T78			
						.0	±0.30										Map title	044	Version	A0	
						.00	±0.20														
Version	Content of change			Date	Signature		Unit	mm	Scale	1:1	Date	20200523									
A			B		C		D		E		F		G		H						