
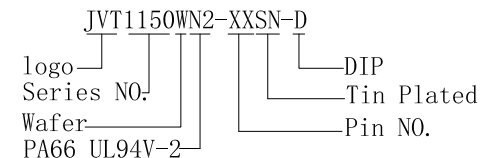
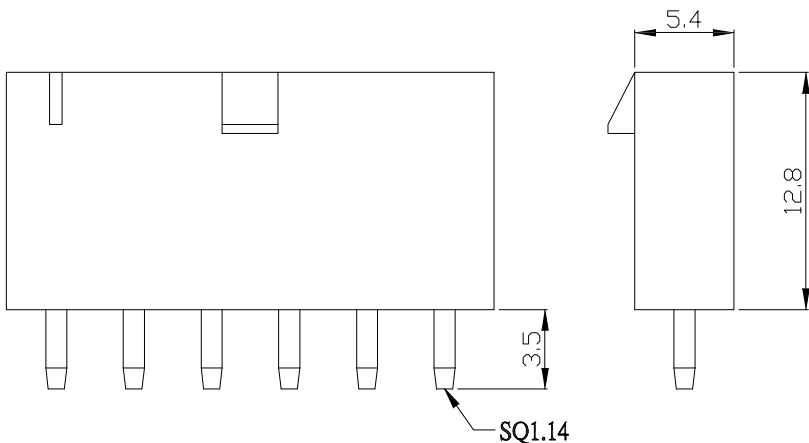


	A	B	C	D	E	F	G	H																		
1	RoHS	 $\overline{A}$, $\overline{B}$, 4.2			2P Circuit1	SPECIFICATIONS																				
2					3P Circuit1	- Voltage rating: 600V AC/DC - Current rating: 7A AC/DC - Withstanding Voltage:1500V AC/minute - Insulation resistance:1000MΩ Min. - Temperature range:-40℃ - +105℃ - Contact resistance:20mΩ Max.																				
3	 SQ1.14				4P Circuit1	HOUSING																				
4	 P.C.B. LAYOUT				5P Circuit1	- Part No.:JVT1150WN2-XXSN-D - Poles:02~06 - Material:PA66 UL 94V-2 - pin: Brass Tin-plated	JVT1150WN2-XXSN-D logo—Series NO.—Wafer—PA66 UL94V-2 DIP—Tin Plated—Pin NO.																			
					6P Circuit1	东莞市乔业电子有限公司 WWW.JVT.LTD.COM 2015.09.22 工程发行章	Dimensions <table border="1"> <thead> <tr> <th>Circuit</th><th>A</th><th>B</th></tr> </thead> <tbody> <tr><td>02</td><td>4.20</td><td>9.60</td></tr> <tr><td>03</td><td>8.40</td><td>13.80</td></tr> <tr><td>04</td><td>12.60</td><td>18.00</td></tr> <tr><td>05</td><td>16.80</td><td>22.20</td></tr> <tr><td>06</td><td>21.00</td><td>26.40</td></tr> </tbody> </table>	Circuit	A	B	02	4.20	9.60	03	8.40	13.80	04	12.60	18.00	05	16.80	22.20	06	21.00	26.40	
Circuit	A	B																								
02	4.20	9.60																								
03	8.40	13.80																								
04	12.60	18.00																								
05	16.80	22.20																								
06	21.00	26.40																								
			<table border="1"> <caption>GENERAL TOLERANCE</caption> <tbody> <tr><td>0</td><td>±0.35</td></tr> <tr><td>.0</td><td>±0.30</td></tr> <tr><td>.00</td><td>±0.20</td></tr> <tr><td>.000</td><td>±0.10</td></tr> </tbody> </table>	0	±0.35	.0	±0.30	.00	±0.20	.000	±0.10	JVT 乔业连接器 CONNECTORS® JVT CONNECTORSGS	Approved by	Check	Design	Standard	4.2mm WAFER Solid needle									
0	±0.35																									
.0	±0.30																									
.00	±0.20																									
.000	±0.10																									
	Version	Content of change	Date	Signature	Unit mm Scale 1:1 Date 20150922	LI	CLYDE	LU	P/N	JVT1150WN2-XXSN-D																
	A	B	C	D	E	F	G	H	Map title	O10 Version AO																

- Voltage rating: 600V AC/DC
- Current rating: 7A AC/DC
- Withstanding Voltage:1500V AC/minute
- Insulation resistance:1000M Ω Min.
- Temperature range:-40℃ - +105℃
- Contact resistance:20m Ω Max.

- Part No.: JVT1150WN2-XXSN-D
- Poles: 02~06
- Material: PA66 UL 94V-2
pin: Brass Tin-plated

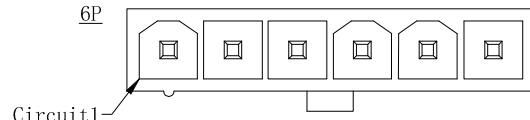

Dimensions		
Circuit	A	B
02	4. 20	9. 60
03	8. 40	13. 80
04	12. 60	18. 00
05	16. 80	22. 20
06	21. 00	26. 40

				GENERAL TOLERANCE	 乔业连接器 JVT CONNECTORS CONNECTORS							Approved by	Check	Design	Standard	4.2mm WAFER Solid needle									
				0 ±0.35									Unit	mm	Scale	1:1	Date	20150922	LI	CLYDE	LU	P/N	JVT1150WN2-XXSN-D		
				.0 ±0.30																		Map title	010	Version	A0
				.00 ±0.20																					
				.000 ±0.10																					
Version	Content of change			Date	Signature		Unit	mm	Scale	1:1	Date	20150922													