




RoHS

SPECIFICATION



- Voltage rating: 600V AC, DC
- Current Rating: 7A, AC, DC
- Withstand voltage: 1500V AC/minute
- Contact resistance: $20\text{m}\Omega_{\text{max}}$
- Insulation resistance: $1000\text{M}\Omega_{\text{min}}$
- Temperature range: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$

WAFER

- Material: Base: Nylon 66 UL94V-2
pin: Brass Tin Plated

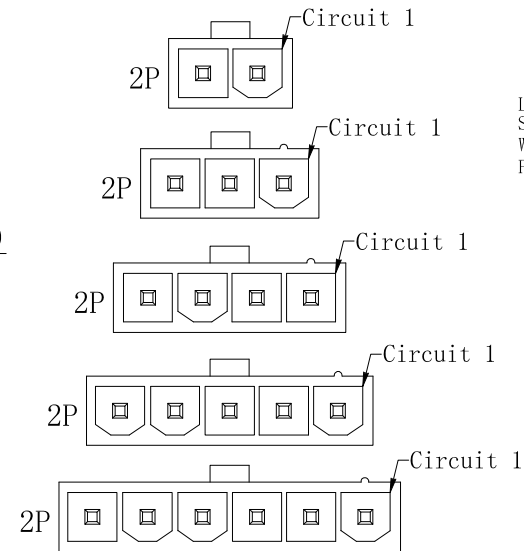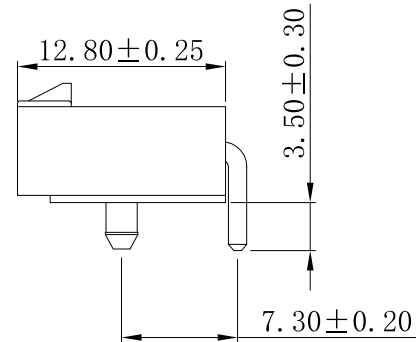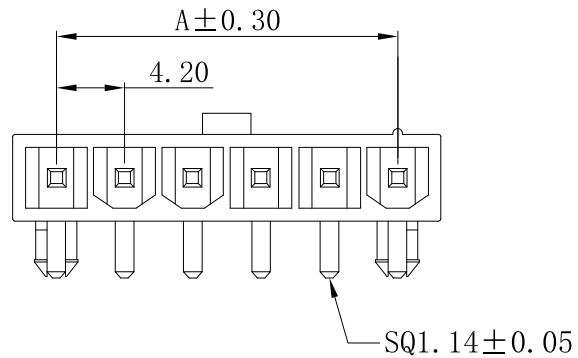

JVT1150WN2-XXSNRP-D
Logo
Series NO.-
Wafer
PA66 UL94V-2
DIP
With boss
R-Right Angle 90°
SN-Tin Plated
Pin NO.

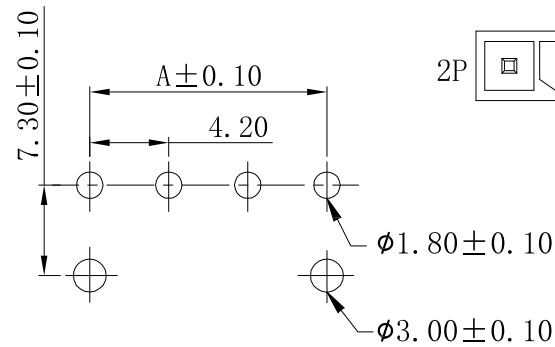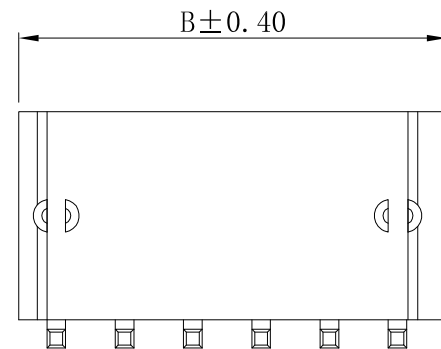

P.C.B LAYOUT



Contact	Dimensions	
	A	B
02	4.20	9.60
03	8.40	13.80
04	12.60	18.00
05	16.80	22.20
06	21.00	26.40

					GENERAL TOLERANCE		 乔业连接器 JVT CONNECTORS					Approved by	Check	Design	Standard	4.2mm Single row DIP 90°								
					0 ±0.35															WAFER Solid needle				
					.0 ±0.30																JVT1150WN2-XXSNRP-D			
					.00 ±0.20																			
					.000 ±0.10																			
Version	Content of change			Date	Signature			Unit	mm	Scale	1:1	Date	20190922	LI	CLYDE	LIU	P/N	JVT1150WN2-XXSNRP-D						
																	Map title	010	Version	A0				
A				B			C			D			E			F			G			H		