RoHS

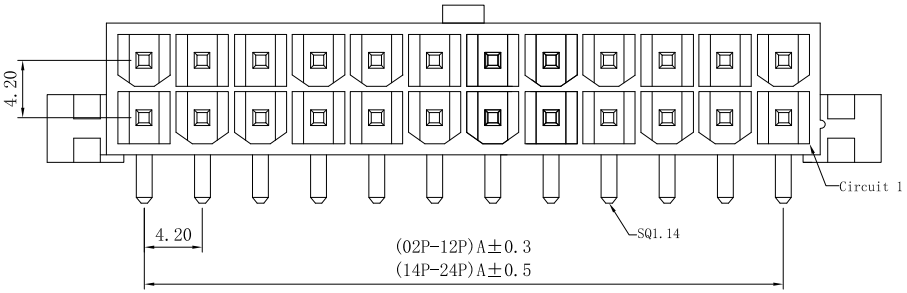

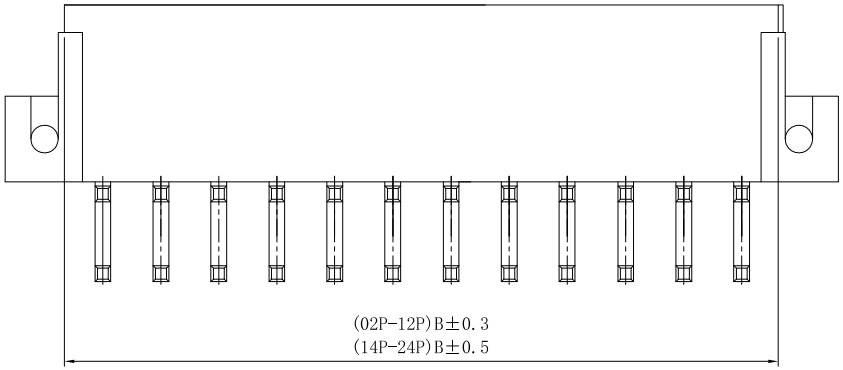

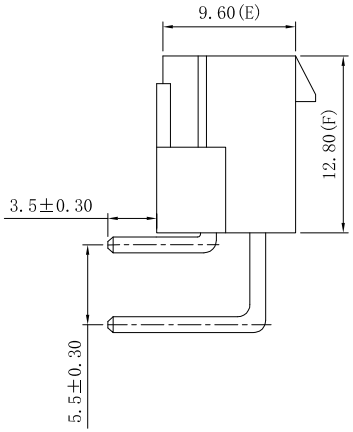

SPECIFICATION

- Voltage rating: 600V AC, DC
- Current Rating:7A,AC,DC
- Withstand voltage: 1500V AC/minute
- Insulation resistance: 1000MΩmin
- Temperature range: -40° C ~ +105° C
- Contact resistance:20mΩ Max.

WAFER

- Material: Base: Nylon 66 UL94V-0/2
  pin: Brass Tin-plated

JVT1150WXX-2*XXSNRE-D

- Logo
- Series NO.
- Wafer
- N2-PA66 UL94V-2
- N0-PA66 UL94V-0
- DIP
- E-Ear lock
- R-Right Angle 90°
- SN-Tin Plated
- Pin NO.

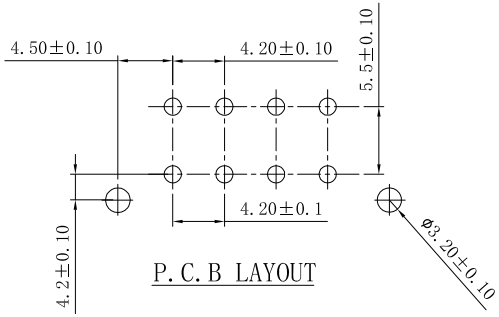

P.C.B LAYOUT

Dimensions

Circuit	A	B	Circuit	A	B
2*01	- -	5.40	2*07	25.20	30.60
2*02	4.20	9.60	2*08	29.40	34.80
2*03	8.40	13.80	2*09	33.60	39.00
2*04	12.60	18.00	2*10	37.80	43.20
2*05	16.80	22.20	2*11	42.00	47.40
2*06	21.00	26.40	2*12	46.20	51.60

Version	Content of change	Date	Signature

GENERAL TOLERANCE: 0 ±0.35; .0 ±0.30; .00 ±0.20; .000 ±0.10

JVT 乔业连接器 JVT CONNECTORS

Unit	mm	Scale	1:1	Date	20180704

Approved by	Check	Design	Standard	4.2mm DUAL ROW DIP 90° WAFER Ear lock Solid needle	
LI	CLYDE	LU	P/N	JVT1150WXX-2*XXSNRE-D	
			Map title	010	Version A0