



RoHS

SPECIFICATION




- Voltage rating: 600V AC, DC
- Current Rating: 7A, AC, DC
- Withstand voltage: 1500V AC/minute
- Contact resistance: 20mΩ max
- Insulation resistance: 1000MΩ min
- Temperature range: -40° C ~ +105° C

WAFER

- Material: Base: Nylon 66 UL94V-2/0
pin: High conductivity copper Tin-plated

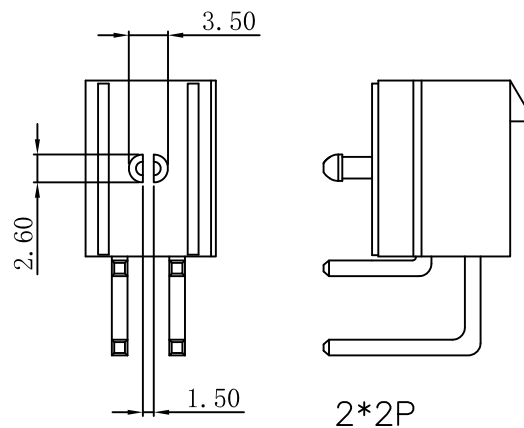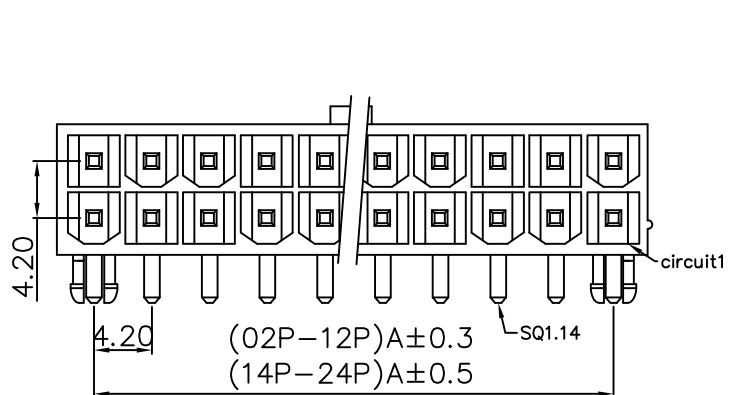

JVT1150WXX-2*XXSNRP-D
logo
Series NO.
Wafer
PA66 UL94V-2
PA66 UL94V-0
DIP
With boss
Right Angle 90°
Tin Plated
Pin NO.

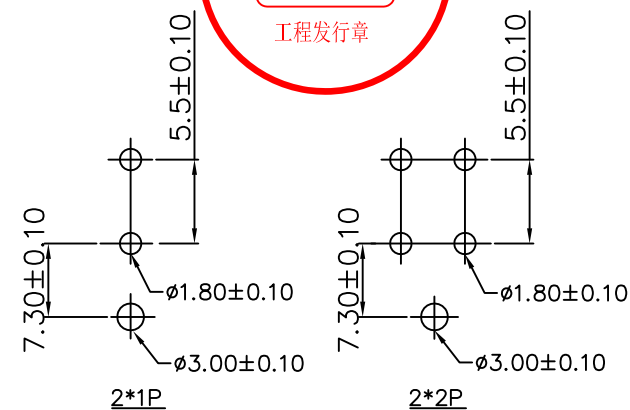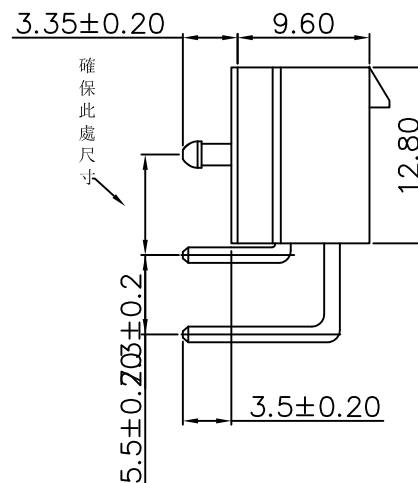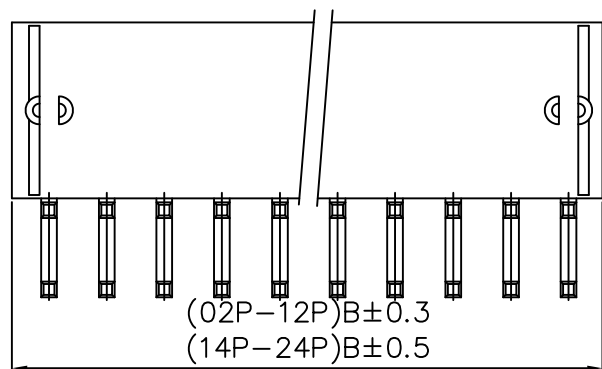

P.C.B. LAYOUT

PIN	DIM. (mm)	
	A	B
2*1	—	5.60
2*2	4.20	9.80
2*3	8.40	14.00
2*4	12.60	18.20
2*5	16.80	22.40
2*6	21.00	26.60
2*7	25.20	30.80
2*8	29.40	35.00
2*9	33.60	39.20
2*10	37.80	43.40
2*11	42.00	47.60
2*12	46.20	51.80

Version		Content of change		Date	Signature	GENERAL TOLERANCE: 0 ±0.35 .0 ±0.30 .00 ±0.20 .000 ±0.10		Unit		mm	Scale	1:1	Date	20150922	Approved by	LI	Check	CLYDE	Design	LU	Standard	P/N	4.2mm WAFER 90° Solid needle With boss		JVT1150WXX-2*XXSNRP-D		Map title	010	Version	A0
---------	--	-------------------	--	------	-----------	--	--	------	--	----	-------	-----	------	----------	-------------	----	-------	-------	--------	----	----------	-----	--	--	-----------------------	--	-----------	-----	---------	----