

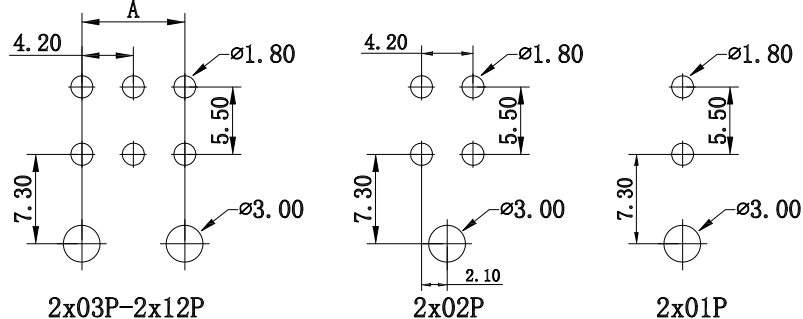

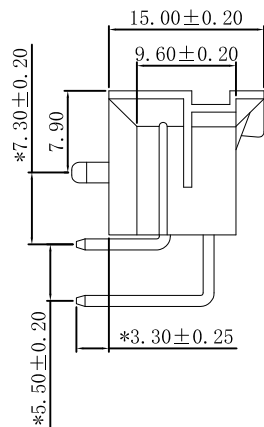
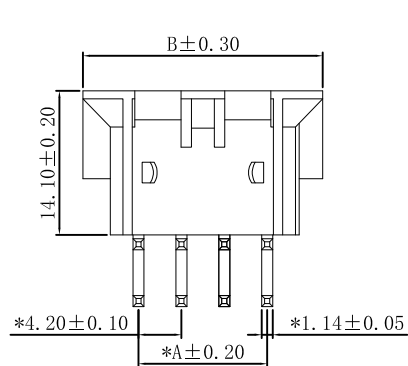


RoHS

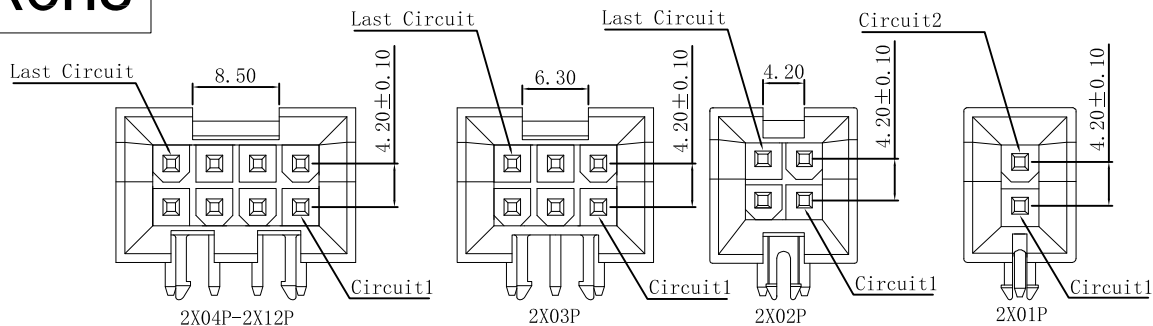

PCB LAYOUT:Component Side
Recommended PCB Thickness 1.78MAX

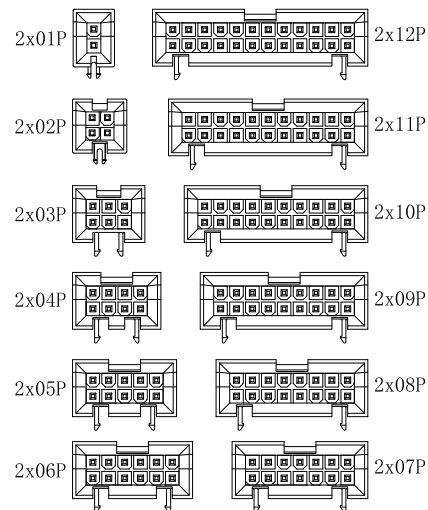

CIRCUIT SIZE LAYOUT

SPECIFICATION

- Voltage rating: 600V AC, DC
- Current Rating:7A, AC, DC
- Withstand voltage: 1500V AC/minute
- Contact resistance: 20mΩ max
- Insulation resistance: 1000MΩ min
- Temperature range: -40° C ~ +105° C

WAFER

- Material: Base: Nylon 66 UL94V-2/0
- pin: Brass Tin-plated

JVT1152WXX-2*XXSNRP-D
logo
Series NO.
Wafer
PA66 UL94V-2
PA66 UL94V-0
DIP
P-With boss
R-Right Angle
90°
Tin Plated
Pin NO.



Part No	Dimensions (mm)	
	A	B
2x01		10.80
2x02	4.20	15.00
2x03	8.40	19.20
2x04	12.60	23.40
2x05	16.80	27.60
2x06	21.00	31.80
2x07	25.20	36.00
2x08	29.40	40.20
2x09	33.60	44.40
2x10	37.80	48.60
2x11	42.00	52.80
2x12	46.20	57.00

					GENERAL TOLERANCE					JVT 乔业连接器 JVT CONNECTORS				Approved by	Check	Design	Standard	4.2mm WAFER 90° With boss		
					0 ±0.35									LI	CLYDE	LU	P/N	JVT1152WXX-2*XXSNRP-D		
					.0 ±0.30												Map title	011	Version	A0
					.00 ±0.20															
					.000 ±0.10															
Version	Content of change			Date	Signature			Unit	mm	Scale	1:1	Date	20150922	LI	CLYDE	LU				
	A			B		C		D		E		F					G		H	