RoHS















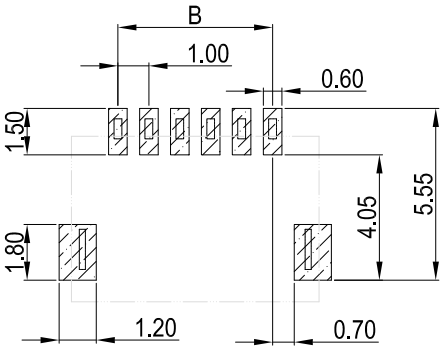

SPECIFICATION

- Voltage rating: 50V AC, DC
- Current Rating: 1A, AC, DC
- Withstand voltage: 250V AC/minute
- Contact resistance: 20mΩmax
- Insulation resistance: 100MΩmin
- Temperature range: -40° C ~ +105° C

WAFER

- Material: PA4T UL94V-0

Color:Natural color
Pin:Phosphor Bronze Tin-plated
Contact:Brass Tin-plated
Suitable JVT1005T series Terminal
JVT1005H series Housing

东莞市乔业电子有限公司
WWW.JVT.LTD
2022.12.16
工程发行章

JVT1005W4T-XXSWRL-S

- Logo
- Series NO.
- Wafer
- PA4T
- Pin NO.
- SMT
- Lock
- R-90°
- SW-Matte Tin plating

Poles	Dimensions (mm)		Poles	Dimensions (mm)	
	A	B		A	B
6	8.00	5.00	11	13.00	10.00
7	9.00	6.00	12	14.00	11.00
8	10.00	7.00	13	15.00	12.00
9	11.00	8.00	14	16.00	13.00
10	12.00	9.00	15	17.00	14.00

Version	Content of change	Date	Signature

GENERAL TOLERANCE
0 ±0.35
.0 ±0.30
.00 ±0.20
.000 ±0.10

JVT 乔业连接器 JVT CONNECTORS

Unit	mm	Scale	1:1	Date	20221216

Approved by	Check	Design	Standard	1.0mm 90° SMT WAFER	
LI	CLYDE	YANG	P/N	JVT1005W4T-XXSWRL-S	
			Map title	031	Version A0