RoHS

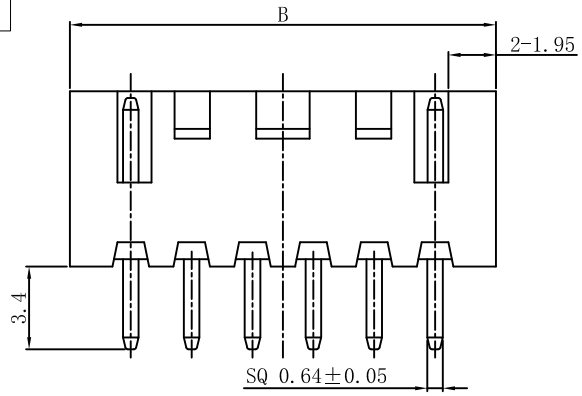

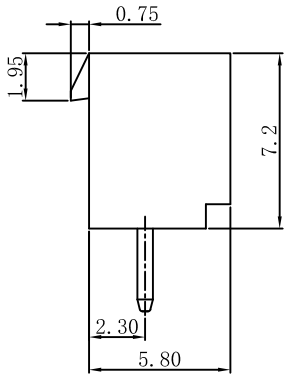

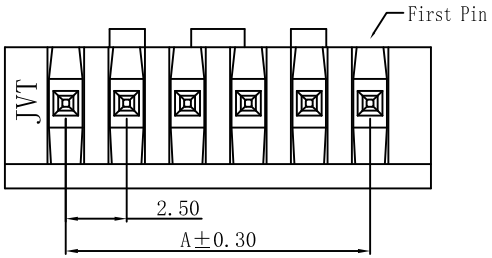

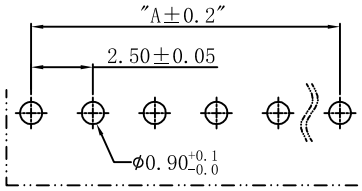

P.C.B LAYOUT

SPECIFICATION

- Voltage rating: 250V AC, DC
- Current Rating:3.0A,AC,DC
- Withstand voltage: 1000V AC/minute
- Contact resistance: 20mΩmax
- Temperature range: -40° C ~ +105° C
- Insulation resistance: 1000MΩmin

WAFER

- Material: Base: Nylon 66 UL94V-0
  pin: Brass Tin-plated
- Mates With Part(s):
  JVT2501 Crimp Housing and Terminal
- Q'ty: 2~8P 1000 pcs/bag
  9~15P 500 pcs/bag

JVT2502WN0-XXSN-D

- Logo
- Series NO.
- Wafer
- PA66 UL94V-0
- Pin NO.
- Tin Plated
- DIP

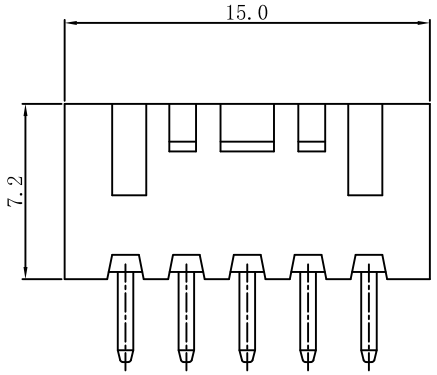

5P

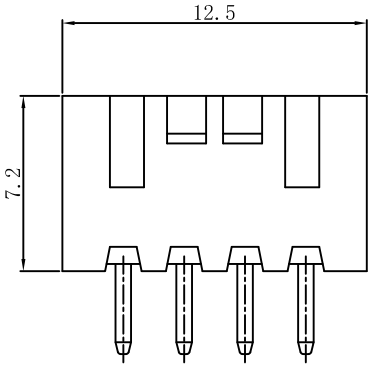

4P

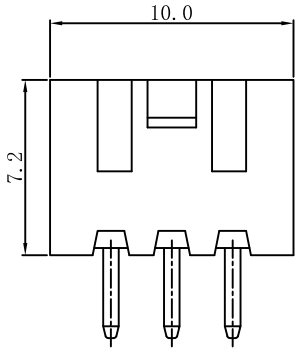

3P

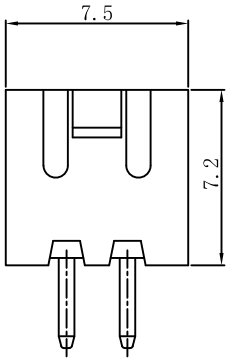

2P

Poles	DIM	
	A	B
02	2.50	7.5
03	5.00	10.0
04	7.50	12.5
05	10.00	15.0
06	12.50	17.5
07	15.00	20.0
08	17.50	22.5
09	20.00	25.0
10	22.50	27.5
11	25.00	30.0
12	27.50	32.5
13	30.00	35.0
14	32.50	37.5
15	35.00	40.0
16	37.50	42.5
17	40.00	45.0

Version	Content of change	Date	Signature

GENERAL TOLERANCE
0 ±0.35
.0 ±0.30
.00 ±0.20
.000 ±0.10

JVT 乔业连接器 JVT CONNECTORS

Unit	mm	Scale	1:1	Date	20150504

Approved by	Check	Design	Standard	2.5mm 180° WAFER	
LI	CLYDE	LU	P/N	JVT2502WN0-XXSN-D	
			Map title	031	Version A0