
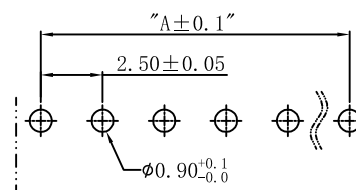
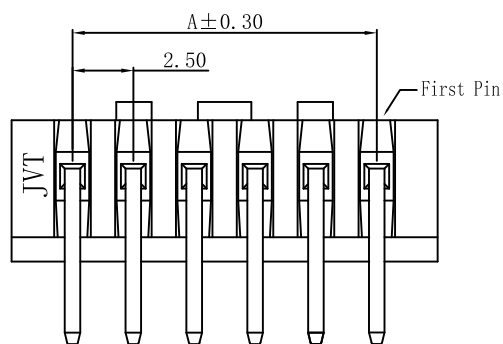
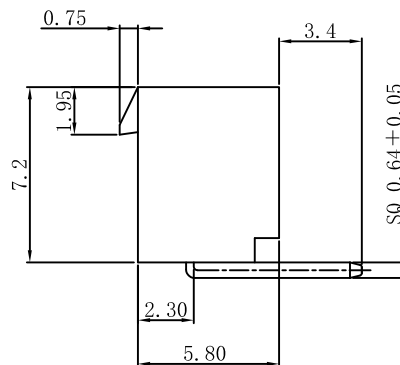


RoHS

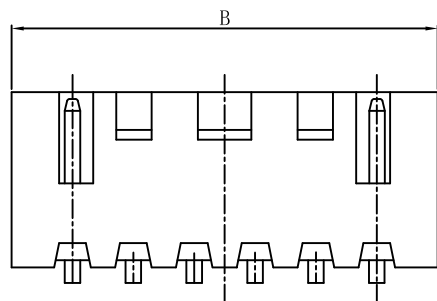

P. C. B. LAYOUT

SPECIFICATION

- Voltage rating: 250V AC, DC
- Current Rating: 3.0A, AC, DC
- Withstand voltage: 1000V AC/minute
- Contact resistance: $20m\Omega_{max}$
- Temperature range: $-40^{\circ}C \sim +105^{\circ}C$
- Insulation resistance: $1000M\Omega_{min}$

WAFER

- Material: Base: Nylon 66 UL94V-0
pin: Brass Tin-plated


- Mates With Part(s):

JVT2501 Crimp Housing and Terminal


- Q'ty: 2~8P 1000 pcs/bag
9~15P 500 pcs/bag

JVT2502WNO-XXSNR-D
Logo
Series NO.
Wafer
PA66 UL94V-0
DIP
R-Right Angle 90°
Tin Plated
Pin NO.


Poles	DIM	
	A	B
02	2.50	7.5
03	5.00	10.0
04	7.50	12.5
05	10.00	15.0
06	12.50	17.5
07	15.00	20.0
08	17.50	22.5
09	20.00	25.0
10	22.50	27.5
11	25.00	30.0
12	27.50	32.5
13	30.00	35.0
14	32.50	37.5
15	35.00	40.0
16	37.50	42.5
17	40.00	45.0

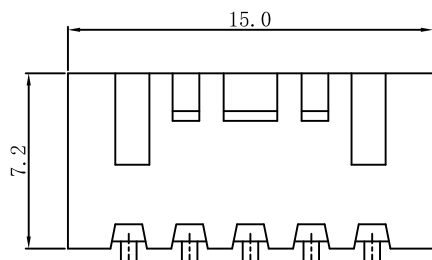


5P

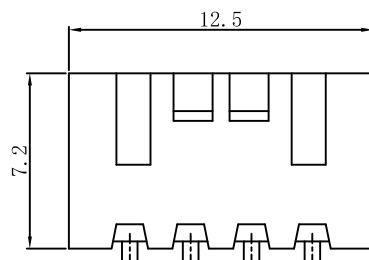

4P



3P



2P

				GENERAL TOLERANCE		JVT 乔业连接器 JVT CONNECTORS CONNECTORS					Approved by	Check	Design	Standard	2.5mm 90° WAFER		
				0 ±0.35							LI	CLYDE	LU	P/N	JVT2502WNO-XXSNR-D		
				.0 ±0.30													
				.00 ±0.20													
				.000 ±0.10													
Version	Content of change	Date	Signature		Unit	mm	Scale	1:1	Date	20150504			Map title	031	Version	A0	