RoHS

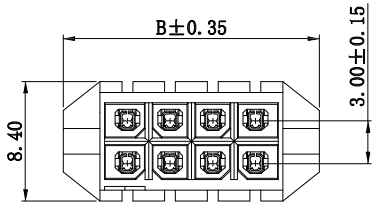





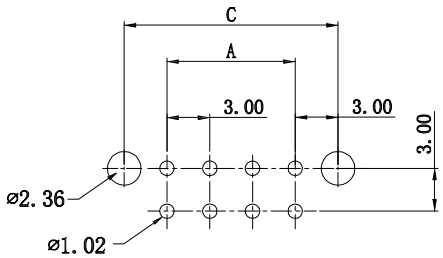

P.C.B LAYOUT: TOP VIEW



■ Specifications :

- Voltage rating: 250V AC / DC
- Current rating: 5A AC / DC
- Withstanding voltage: 1000V AC/minute
- Temperature range: -40°C~+105°C
- Insulation resistance: ≥1000MΩ
- Contact resistance: ≤10mΩ
- After environmental testing: ≤30mΩ
- Material(Pin): Phosphor Bronze

JVT3028W9T-2*XXSNMP-D

- Logo
- Series NO.
- Wafer 9T-PA9T UL94V-0
- Pin NO.
- SN-Tin Plated
- M-Male
- P-With boss
- DIP

PART NO.	Dimensions (mm)		
	A	B	C
2*02	3.00	12.00	9.00
2*03	6.00	15.00	12.00
2*04	9.00	18.00	15.00
2*05	12.00	21.00	18.00
2*06	15.00	24.00	21.00
2*07	18.00	27.00	24.00
2*08	21.00	30.00	27.00
2*09	24.00	33.00	30.00
2*10	27.00	36.00	33.00
2*11	30.00	39.00	36.00
2*12	33.00	42.00	39.00

东莞市乔业电子有限公司 WWW.JVT.LTD 2022 12 12 工程发行章

Version	Content of change	Date	Signature

GENERAL TOLERANCE: 0 ±0.35; .0 ±0.30; .00 ±0.20; .000 ±0.10

JVT 乔业连接器 JVT CONNECTORS

Unit	mm	Scale	1:1	Date	20221212

Approved by	Check	Design	Standard	3.0mm Male Wafer 带柱 DIP	
LI	CLYDE	LU	P/N	JVT3028W9T-2*XXSNMP-D	
			Map title	011	Version A0