




RoHS


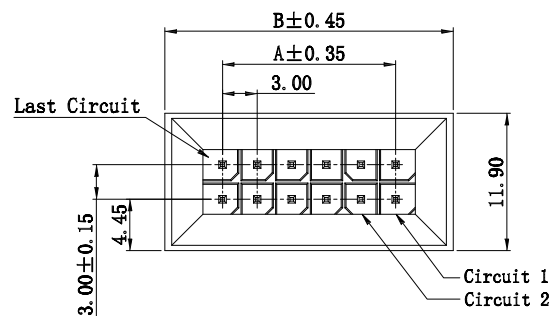


Specifications :


- Voltage rating: 250V AC / DC
- Current rating: 5A AC / DC
- Withstanding voltage: 1000V AC/minute
- Temperature range: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$
- Insulation resistance: $\geq 1000\text{M}\Omega$
- Contact resistance: $\leq 10\text{m}\Omega$
- After environmental testing: $\leq 30\text{m}\Omega$
- Material(Pin): Brass
- Mates With Housing 3028H

JVT3028W9T-2*XXXXWPK-D

Logo
Series NO.
Wafer
9T-PA9T UL94V-0
DIP
K-With KinK
P-With boss
W-Female
SW-Matte Tin plating
SN-Tin Plated
GA-All gold plating
Pin NO.

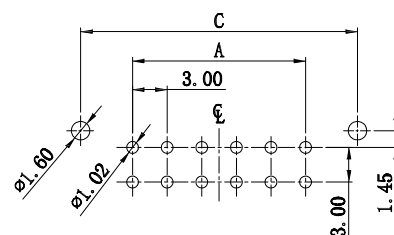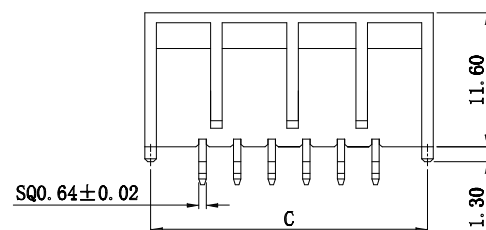

P.C.B LAYOUT: TOP VIEW
TOLERANCE: $\pm 0.05\text{mm}$

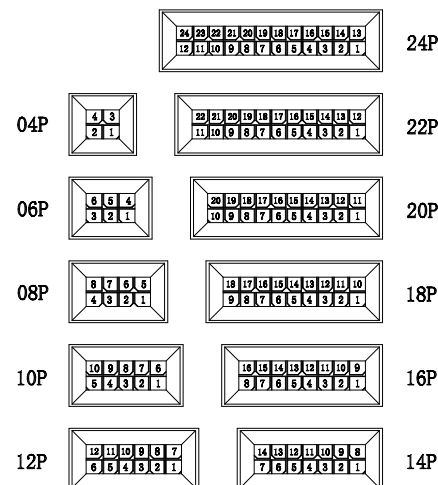

CIRCUIT SIZE LAYOUT

Part No.	Dimensions (mm)		
	A	B	C
2x02	3.00	13.00	12.00
2x03	6.00	16.00	15.00
2x04	9.00	19.00	18.00
2x05	12.00	22.00	21.00
2x06	15.00	25.00	24.00
2x07	18.00	28.00	27.00
2x08	21.00	31.00	30.00
2x09	24.00	34.00	33.00
2x10	27.00	37.00	36.00
2x11	30.00	40.00	39.00
2x12	33.00	43.00	42.00

				GENERAL TOLERANCE		JVT 乔业连接器 JVT CONNECTORS CONNECTORS							Approved by	Check	Design	Standard	3.0mm Female Wafer 带柱 打K			
				0 ±0.35 .0 ±0.30 .00 ±0.20 .000 ±0.10									LI	CLYDE	LU	P/N	JVT3028W9T-2*XXXXWPK-D			
																Map title	O11	Version	A0	
Version	Content of change		Date	Signature												Unit	mm	Scale	1:1	Date
A			B		C		D		E			F		G			H			