
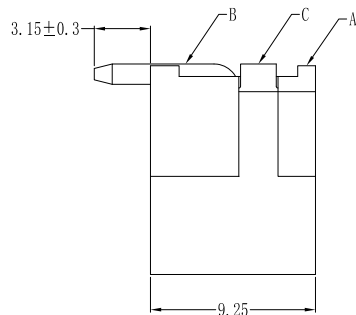


RoHS


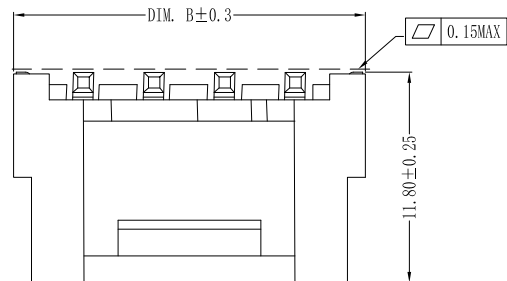


SPECIFICATION


- Voltage rating: 250V AC, DC
- Current Rating: 10A, AC, DC
- Withstand voltage: 1500V AC/minute
- Contact resistance: 20mΩ max
- Insulation resistance: 1000MΩ min
- Temperature range: -40° C ~ +105° C

WAFER

- Material: Base: PA9T UL94V-0
pin: Brass (C2680-H) / Phosphor Bronze
Tin-plated (NI30U" / SN70U" MIN)
- Mates With Part(s):
JVT1121 Crimp Housing and Terminal

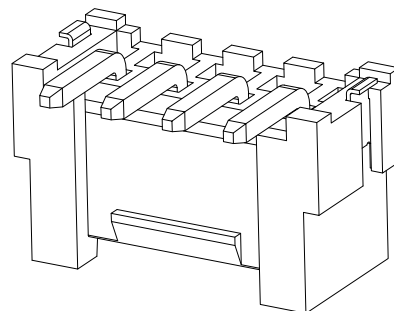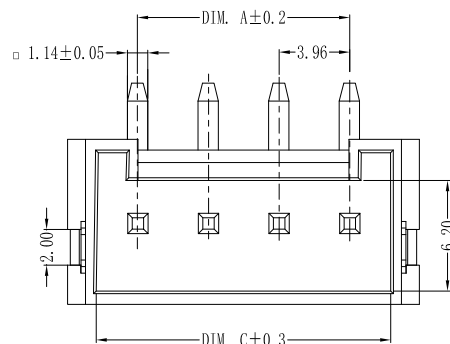

JVT1120W9T-XXSN-S
Logo
Series NO.
Wafer
9T-PA9T UL94V-0
SMT
Tin Plated
Pin NO.

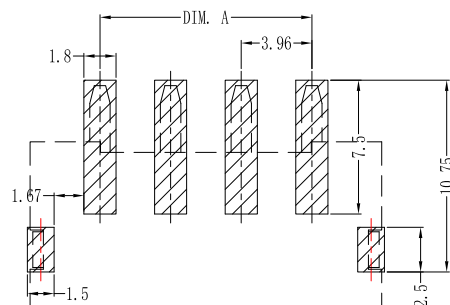

Mating PCB detail



Circuits	Dimensions (mm)		
	DIM. A	DIM. B	DIM. C
02	3.96	11.80	8.60
03	7.92	15.76	12.56
04	11.88	19.72	16.52
05	15.84	23.68	20.48
06	19.80	27.64	24.44
07	23.76	31.60	28.40
08	27.72	35.56	32.36
09	31.68	39.52	36.32
10	35.64	43.48	40.28
11	39.60	47.44	44.24
12	43.56	51.40	48.20
13	47.52	55.36	52.16
14	51.48	59.32	56.12
15	55.44	63.28	60.08
16	59.40	67.24	64.04

C	SOLDER TAB	2 PCS	Phosphor Bronze	Sn-plated
B	CONTACT	2*16 PCS	Brass	Sn-plated
A	PEDESTAL	1 PCS	PA9T	UL 94V-0, COLOR: BEIGE
ITEM	COMPONENT	Q'TY	MATERIAL	FINISH

				GENERAL TOLERANCE
				0 ±0.35
				.0 ±0.30
				.00 ±0.20
				.000 ±0.10
Version	Content of change	Date	Signature	

JVT 乔业连接器
JVT CONNECTORS

Approved by	Check	Design	Standard	3.96mm 180° WAFER SMT		
LI	CLYDE	LIU	P/N	JVT1120W9T-XXSN-S		
			Map title	141	Version	A0

A

B

C

D

E

F

G

H