
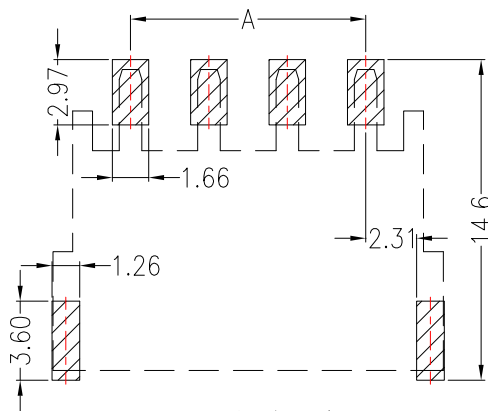
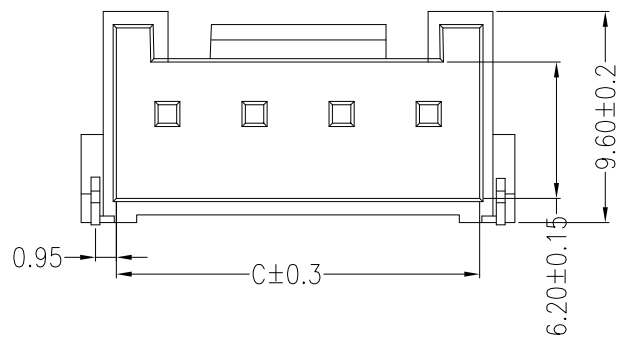
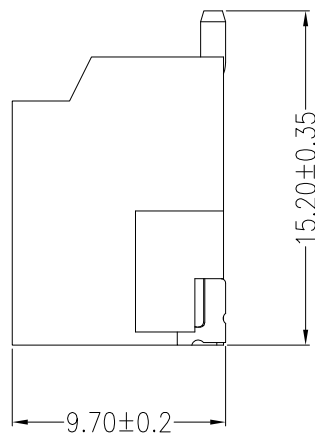


RoHS

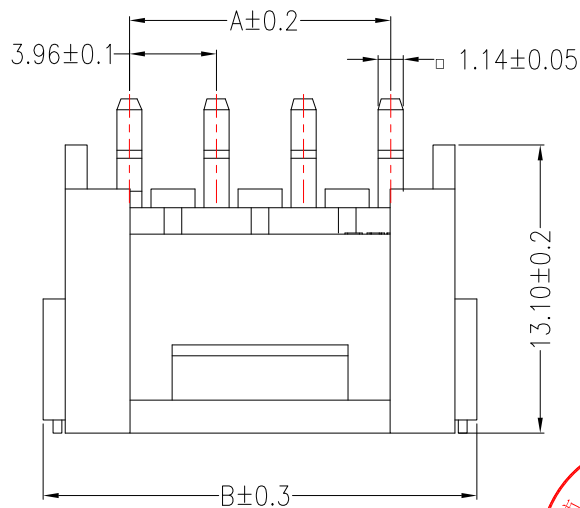

Mating PCB detail

SPECIFICATION

- Voltage rating: 250V AC, DC
- Current Rating: 10A, AC, DC
- Withstand voltage: 1500V AC/minute
- Contact resistance: 20mΩ max
- Insulation resistance: 1000MΩ min
- Temperature range: -40° C ~ +105° C

WAFER

- Material: Base: PA9T UL94V-0
pin: Brass (C2680-H)
Tin-plated (NI30U"/SN70U"MIN)
- Mates With Part(s):
JVT1121 Crimp Housing and Terminal

JVT1120W9T-XXSNR-S
Logo
Series NO.
Wafer
9T-PA9T UL94V-0
SMT
R-Right Angle 90°
Tin Plated
Pin NO.

Circuits	Dimensions (mm)			Circuits	Dimensions (mm)		
	A	B	C		A	B	C
02	3.96	11.80	8.60	10	35.64	43.48	40.28
03	7.92	15.76	12.56	11	39.60	47.44	44.24
04	11.88	19.72	16.52	12	43.56	51.40	48.20
05	15.84	23.68	20.48	13	47.52	55.36	52.16
06	19.80	27.64	24.44	14	51.48	59.32	56.12
07	23.76	31.60	28.40	15	55.44	63.28	60.08
08	27.72	35.56	32.36	16	59.40	67.24	64.04
09	31.68	39.52	36.32				

Version		Content of change		Date		Signature		Unit		mm		Scale		1:1		Date		20170922	
A		B		C		D		E		F		G		H					

JVT 乔业连接器
JVT CONNECTORS
CONNECTORS

Approved by	Check	Design	Standard	3.96mm 90° WAFER SMT			
LI	CLYDE	LIU	P/N	JVT1120W9T-XXSNR-S			
			Map title	141	Version	A0	