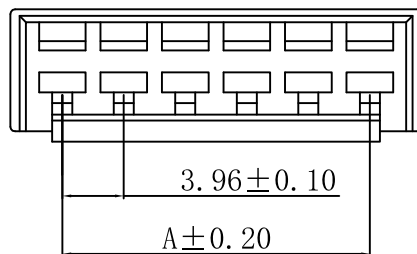
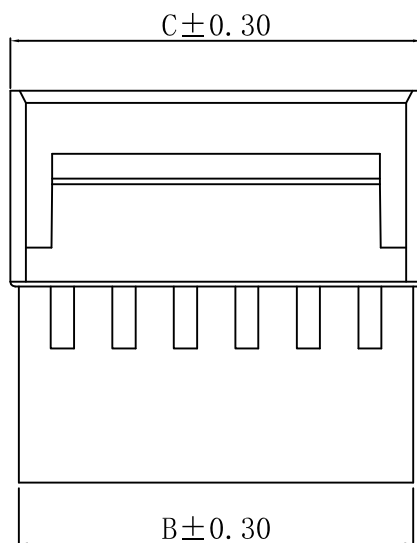
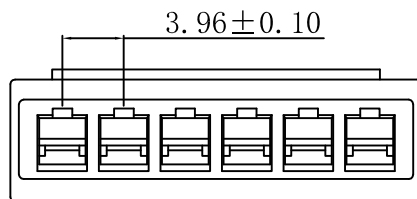


RoHS

 8.5 ± 0.30 7.9 ± 0.30 5.1 ± 0.30 12.6 ± 0.30 25.2 ± 0.35

SPECIFICATION

- Voltage rating: 250V AC, DC
- Current Rating: 10A, AC, DC
- Withstand voltage: 1500V AC/minute
- Contact resistance: $20\text{m}\Omega$ max
- Insulation resistance: $1000\text{M}\Omega$ min
- Temperature range: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$

HOUSING

- Material: Nylon 66 UL 94V-0/2

JVT1121HXX-XXW
Logo Series NO. Housing PA66 UL94V-0 PA66 UL94V-2
W-Female HSG
Pin NO.

poles	Dimensions (mm)		
	A	B	C
02	3.96	9.54	10.64
03	7.92	13.50	14.60
04	11.88	17.46	18.56
05	15.84	21.42	22.52
06	19.80	25.38	26.48
07	23.76	29.34	30.44
08	27.72	33.30	34.40
09	31.68	37.26	38.36
10	35.64	41.22	42.32
11	39.60	45.18	46.28
12	43.56	49.14	50.24



				GENERAL TOLERANCE	JVT 乔业连接器 JVT CONNECTORS						Approved by	Check	Design	Standard	3.96mm Female HSG		
				0 ±0.35							LI	CLYDE	LIU	P/N	JVT1121HXX-XXW		
				.0 ±0.30													
				.00 ±0.20													
Version	Content of change		Date	Signature													
							</										