




RoHS



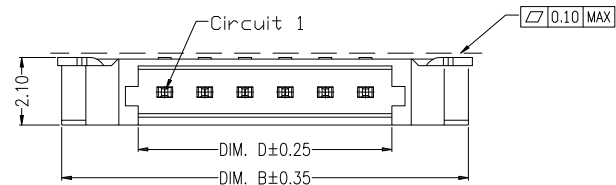


SPECIFICATION


- Voltage rating: 125V AC, DC
- Current Rating: 1A, AC, DC
- Withstand voltage: 250V AC/minute
- Contact resistance: 20mΩ max
- Insulation resistance: 100MΩ min
- Temperature range: -40° C ~ +105° C

WAFER

- Material: LCP, UL94V-0 Natural (Beige)/Black
- Pin Material: Phosphor Bronze/Tin-plated
- Solder Tabs: Phosphor Bronze/Tin-plated

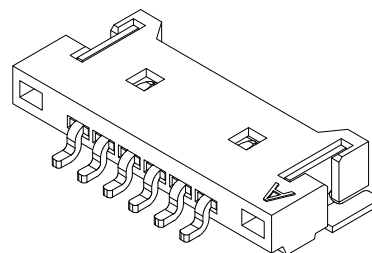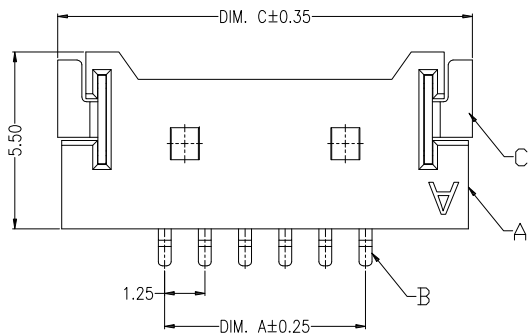

JVT1259WLP-XXSWR-S
Logo
Series NO.
Wafer
LCP
Pin NO.
SMT
R-90°
SW-Matte Tin plating

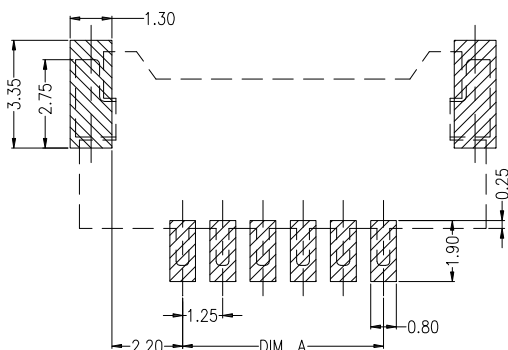

SUGGESTED PCB LAYOUT
(COMPONENT SIDE)



Circuits	Dimensions (mm)			
	DIM. A	DIM. B	DIM. C	DIM. D
02	1.25	7.65	7.90	2.90
03	2.50	8.90	9.15	4.15
04	3.75	10.15	10.40	5.40
05	5.00	11.40	11.65	6.65
06	6.25	12.65	12.90	7.90
07	7.50	13.90	14.15	9.15
08	8.75	15.15	15.40	10.40
09	10.00	16.40	16.65	11.65
10	11.25	17.65	17.90	12.90
11	12.50	18.90	19.15	14.15
12	13.75	20.15	20.40	15.40
13	15.00	21.40	21.65	16.65
14	16.25	22.65	22.90	17.90
15	17.50	23.90	24.15	19.15

C	Solder Tab	1 PCS	Phosphor bronze	MATTE Sn-plated
B	Contacts	2~30 PCS	Phosphor bronze	MATTE Sn-plated
A	Housing	2~30 PCS	LCP	UL 94V-0, COLOR: BEIGE/BLACK
ITEM	COMPONENT	Q' ty	MATERIAL	FINISH

Version	Content of change	Date	Signature	Unit	mm	Scale	1:1	Date	20130708	Approved by	LI	Check	CLYDE	Design	LU	Standard	1.25mm 90° WAFER
																P/N	JVT1259WLP-XXSWR-S
																Map title	141 Version A0