
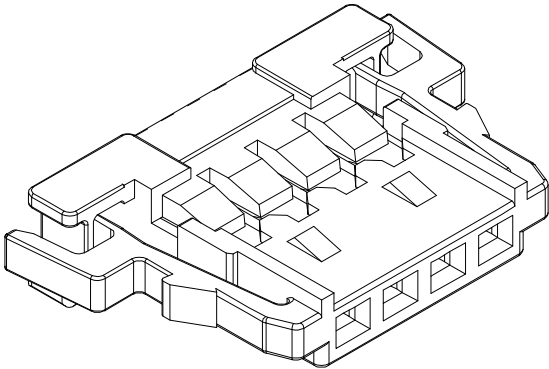


RoHS


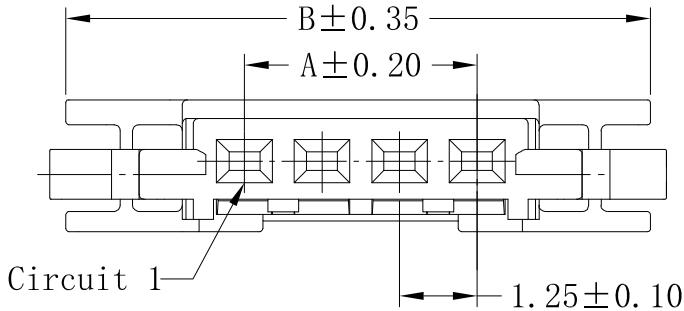


SPECIFICATIONS

- Voltage rating: 125V AC, DC
- Current rating: 1A, AC, DC
- Withstanding Voltage: 250V AC/minute
- Insulation resistance:100MΩ min
- Temperature range: -40° C~+105° C
- Contact resistance: 20mΩ max

HOUSING

- Poles: 2-30
- Material: PA66/LCP, UL94V-0
- Q' ty: 1000pcs/bag
- Mates With Part(s):JVT1258 Terminal

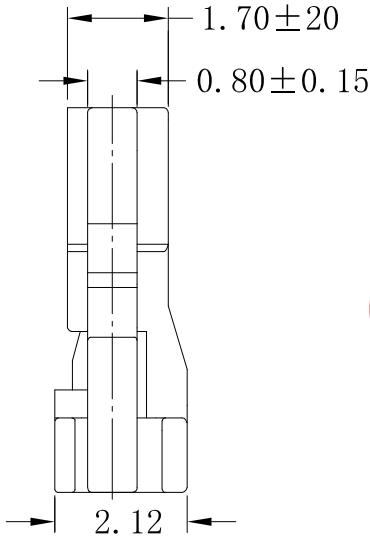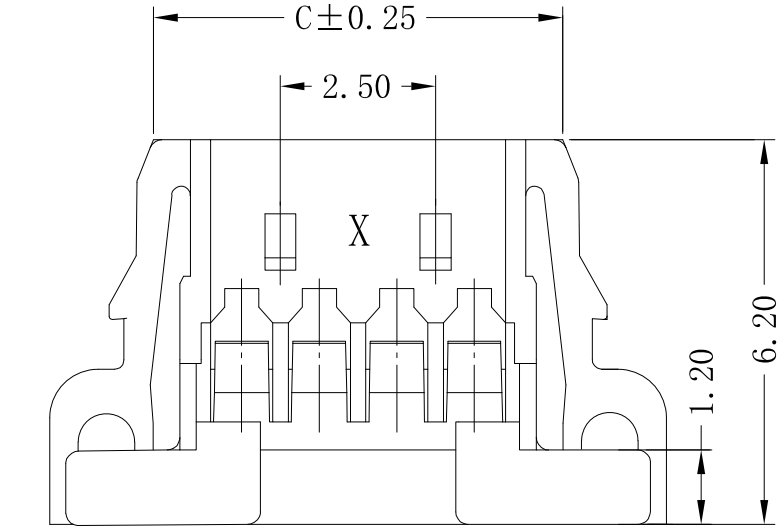

JVT1258HXX-XXL
Logo
Series NO.
Housing
PA66 UL94V-0
LCP UL94V-0
Lock
Pin NO.



Poles	Dimensions (mm)		
	A	B	C
02	1.25	6.75	4.10
03	2.50	8.00	5.35
04	3.75	9.25	6.60
05	5.00	10.50	7.85
06	6.25	11.75	9.10
07	7.50	13.00	10.35
08	8.75	14.25	11.60
09	10.00	15.50	12.85
10	11.25	16.75	14.10
11	12.50	18.00	15.35
12	13.75	19.25	16.60
14	16.25	21.75	17.85
15	17.50	23.00	19.10
20	23.75	29.25	25.35
30	36.25	41.75	37.85

				GENERAL TOLERANCE		JVT JVT CONNECTORS CONNECTORS					Approved by	Check	Design	Standard	1.25mm Ultra-thin HSG Lock		
				0 ±0.35							LI	CLYDE	LU	P/N	JVT1258HXX-XXL		
				.0 ±0.30										Map title	031	Version	A0
				.00 ±0.20													
Version	Content of change	Date	Signature		Unit	mm	Scale	1:1	Date	20130607							
				.000 ±0.10													